


TECHICAL REQUIREMENTS

1. CANTILEVER STRENGTH: 2000# [9.1KN]
2. TENSILE STRENGTH: 3500# [15.9KN]
3. TORSION STRENGTH: 4500" # [20.4KN.M]
4. COMPRESSION STRENGTH: 30000# [136KN]
5. NEMA VOLTAGE RATING: 4.8KV
6. 50 HERTZ WITHSTAND-DRY: 19KV
7. 50 HERTZ WITHSTAND-DEW: 15KV
8. IMPULSE WITHSTAND: 60KV
9. GLAZE: ANSI 70 LIGHT GREY
10. APPLICABLE STANDARD: ANSI C29.10-1989

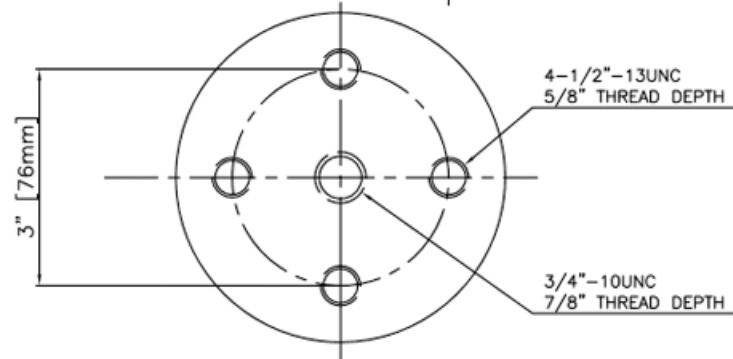

EGER PRODUCTS, INC.

REVISIONS:

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
EGER PRODUCTS, INC.. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
EGER PRODUCTS INC. IS
PROHIBITED.

DATE: 8/1/2014

CUSTOMER:

SCALE: NTS

A30-1

DRAWN BY: E. GREEN

DWG. INDOOR BUS SUPPORT

APPROVED BY:

MATERIAL: