


- TECHICAL REIUREMENTS
1. CANTILEVER STRENGTH: 1250# [5.76KN]
  2. TENSILE STRENGTH: 5000# [22.7KN]
  3. TORSION STRENGTH: 6000# [27.2KN.M]
  4. COMPRESSION STRENGTH: 30000# [136KN]
  5. NEMA VOLTAGE RATING: 34.5KV
  6. 50 HERTZ WITHSTAND-DRY: 80KV
  7. 50 HERTZ WITHSTAND-DEW: 60KV
  8. IMPULSE WITHSTAND: 200KV
  9. GLAZE: ANSI 70 LIGHT GREY
  10. APPLICABLE STANDARD: ANSI C29.10-1989

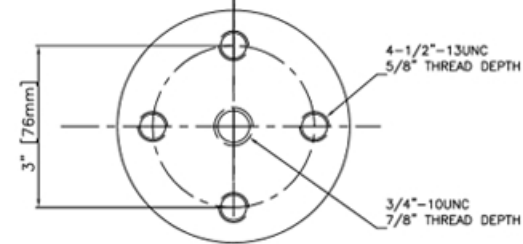

EGER PRODUCTS, INC.

**REVISIONS:**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
EGER PRODUCTS, INC.. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
EGER PRODUCTS INC. IS  
PROHIBITED.

DATE: 8/1/2014

CUSTOMER:

SCALE: NTS

A30-6

DRAWN BY: E. GREEN

DWG. INDOOR BUS SUPPORT

APPROVED BY:

MATERIAL: