


CATALOG NUMBER	LINE VOLTAGE	MAX. RIV
U57 - 1G	25 kV	100
U57 - 2G	35 kV	100
U57 - 3G	45 kV	200
U57 - 4G	55 kV	200
U57 - 5G	66 kV	200

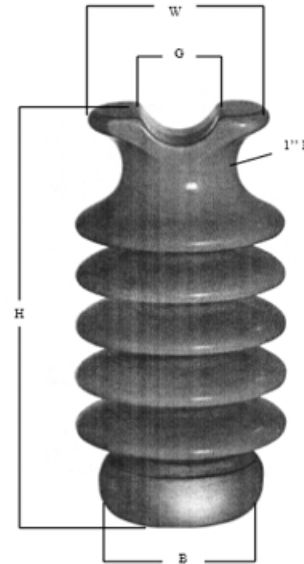

IMPULSE FLASHOVER POS.	NEG.	LEAKAGE DIST. INCHES	DRY ARCING INCHES
130	155	14	6.5
180	205	22	9.5
210	260	29	12.25
255	340	40	14.5
290	380	45	17.25

CATALOG NUMBER	ANSI CLASS	DIM. H	DIM. B	DIM. W	DIM. G	NUMBER OF SKIRTS	WEIGHT PER 100	STANDARD PACKAGE
U57 - 1G	57 - 1	8 13/16"	4 1/4"	4 1/2"	1"	4	1452 LBS.	6
U57 - 2G	57 - 2	12"	4 1/4"	4 1/2"	1"	6	2255 LBS.	3
U57 - 3G	57 - 3	15 1/4"	5 1/4"	4 1/2"	1"	8	2985 LBS.	3
U57 - 4G	57 - 4	17"	5 1/2"	6 5/8"	1 3/4"	11	4000 LBS.	3
U57 - 5G	57 - 5	20"	5 1/2"	6 5/8"	1 3/4"	12	5250 LBS.	2

THE ABOVE LINE POST INSULATORS ARE OFFERED IN A "SKY GRAY" GLAZE. (ANSI - 70)
FOR CHOCOLATE GLAZE CHANGE THE SUFFIX IN THE CATALOG NUMBER FROM "G" TO "B".
ITEMS #1 THROUGH #3 ARE "F" NECK INSULATORS AND ITEMS #4 AND #5 ARE "N" NECK INSULATORS.
THE CANTILEVER STRENGTH ON EACH OF THESE INSULATORS IS 2800 POUNDS.
LINE POST STUDS ARE FURNISHED SEPARATELY. PLEASE REFER TO OUR HARDWARE SECTION FOR SELECTION.
CONTACT UPI FOR DETAIL DRAWINGS ON ANY OF THE ABOVE INSULATORS.



EGER PRODUCTS, INC.

REVISIONS:

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
EGER PRODUCTS, INC.. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
EGER PRODUCTS INC. IS
PROHIBITED.

DATE: 8/1/2014

CUSTOMER:

SCALE: NTS

TIE TOP POST INSULATORS

DRAWN BY: E. GREEN

DWG. TIE TOP POST INSULATORS

APPROVED BY:

MATERIAL: